

BEYOND
FLOORING



COMMERCIAL

**Product catalogue
2022**

CARPET TILES



COMMERCIAL

“

We offer top-quality products,
impeccable service,
innovative, sustainable production
and a proven track record...

But most of all,
we love helping to
achieve your goals.”

About IVC Commercial

IVC Commercial is a global player in the design and manufacture of flooring solutions including Carpet Tiles, Luxury Vinyl Tiles (LVT), Heterogeneous Vinyl and Laminate for use in business, public and private environments.

As the commercial division of IVC Group, we're focused on improving the productivity and wellbeing of users in spaces through innovative solutions that are easy to implement and affordable. Accountable for our actions, we design and make floors responsibly in Europe, developing a circular approach to the future of flooring.

IVC Group is part of Mohawk Industries Inc., the world's largest flooring company. With 1,500 employees and 7 production sites in Europe and Russia, IVC Group produces over 130,000,000m² of flooring every year.



Clay Create 955 - 977 - 979

Clay Create

Rudiments

- Construction: tufted 1/12" gauge loop
- Backing: EcoFlex™ Statera
- Pile material: 100% solution dyed nylon
- Dimensions - m²/box: 25 x 100 cm - 5 m²

- Pile weight: ± 600 g/m²
- Pile thickness: ± 3,4 mm
- Total thickness: ± 7,1 mm
- Wear classification: 33 / LC1

- Fire classification: Bfl-s1
- Impact sound reduction: ΔLw = 28 dB
- Sound absorption: 0,15 αw
- GUT-Prodís number: 5E8698AB

Clay Create



977 LRV: 23,40 - L 54,85



699 LRV: 3,14 - L 22,84



872 LRV: 12,76 - L 39,73




599 LRV: 3,03 - L 27,35



887 LRV: 2,97 - L 20,00




556 LRV: 11,63 - L 39,77

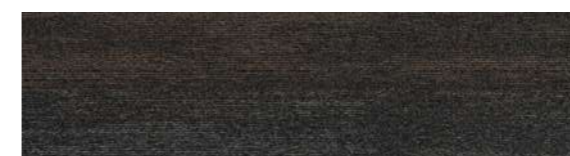

987 LRV: 5,01 - L 21,47



594 LRV: 16,70 - L 52,41

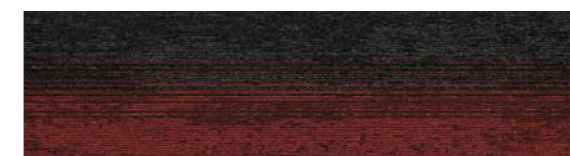

339 LRV: 3,48 - L 23,56



955 LRV: 10,18 - L 36,61



325 LRV: 7,46 - L 35,11



979 LRV: 4,79 - L 29,01

LRV = Light Reflectance Value according to BS 8493, L = according to CIE L*a*b* colour space



COMMERCIAL

EcoFlex™ Echo / Clay Create

Carpet Tiles

Technical Specifications

Spécifications techniques - Technische specificaties - Technische Spezifikationen

Construction Structure - Structuur - Konstruktion		Tufted 1/12" gauge loop
Pile fibre composition Composition des fibres - Poolmateriaal - Material der Polnutschicht		100% solution dyed nylon
Secondary backing Envers - Rug - Beschichtung		EcoFlex™ Echo (94% Recycled Felt)
Total weight Poids total - Totaal gewicht - Gesamtgewicht		± 4700 g/m ²
Pile weight Poids du velours - Poolgewicht - Poleinsatzgewicht		± 600 g/m ²
Surface pile weight Poids du velours utile - Effectieve poolmassa - Polnutschichtgewicht		± 384 g/m ²
Total thickness Epaisseur totale - Totale dikte - Gesamtdicke		± 9,2 mm
Surface pile thickness Hauteur du velours - Poolhoogte - Poldicke		± 3,4 mm
Surface pile density Densité du velours - Pooldichtheid - Polrohdichte		± 0,115 g/cm ³
Number of tufts Nombre de boucles - Aantal noppen - Noppenzahl		205.000/m ²
Wear classification Classement d'usage - Gebruiksklasse - Beanspruchungsklasse	EN 1307	33 / LC1
Castor chair suitability Résistance aux chaises à roulettes - Rolstoelgeschiktheid - Stuhlrolleneignung	EN 985	A: intensive use
Fire classification Comportement au feu - Brandgedrag - Brandklasse	EN 13501-1	Bfl-s1
Dimensional stability Stabilité dimensionnelle - Dimensionele stabiliteit - Dimensionsstabilität	EN 986	≤ 0,2%
Colour fastness to light Solidité des couleurs à la lumière - Lichtbestendigheid van de kleuren - Lichtechtheit	EN ISO 105-B02	≥ 7
Rubbing fastness Solidité au frottement - Wrijftechtheid - Reibechtheit	EN ISO 105-X12	≥ 4
Colour fastness to water Solidité à l'eau - Waterechtheid - Wasserechtheit	EN ISO 105-E01	≥ 4
Thermal resistance Résistance thermique - Warmtedoorlaatweerstand - Wärmedurchlasswiderstand	ISO 8302	0,127 m ² .K/W
Sound absorption Absorption phonique - Geluidsabsorptie - Schallabsorptionsgrad	EN ISO 354	0,25 a w Hz 125 250 500 1000 2000 4000 a s 0,02 0,03 0,3 0,22 0,32 0,48
Impact sound reduction Réduction phonique aux bruits d'impacts - Reductie contactgeluid - Trittschallverbesserungsmaß	EN ISO 10140-3	ΔLw = 31 dB
Permanent antistatic Antistatique permanent - Permanent antistatisch - Permanent antistatisch	ISO 6356	≤ 2 kV
Number of colours Nombre de coloris - Aantal kleuren - Anzahl der Farben		12
Size & Packaging Dimensions & Emballage - Formaats en verpakking - Abmessungen & Verpackung		25 x 100 cm 4 m ² /box - 24 boxes/pallet
GUT-Prodis Number Numéro GUT Prodis - Nummer GUT Prodis - GUT-Prodis Nummer		5E8698AB

We reserve all rights for technical improvements. 09/2022

