





Luxe Blend Catalogue

WOOD YOU LIKE

BARLINEK FLOORS IN HARMONY WITH NATURE















TAME THE FORCES OF NATURE

ENGINEERED WOOD FLOORING

DIMENSIONS UP TO 10 TIMES MORE STABLE

OUR CLIMATE IS A REAL CHALLENGE FOR THE FLOOR. NATURAL WOOD'S MOISTURE CONTENT WILL VARY DEPENDING ON THE WEATHER OUTSIDE. DUE TO THIS, TRADITIONAL WOOD FLOORS TEND TO SWELL, SQUEAK OR DRY OUT CAUSING GAPS TO APPEAR. BUT THIS DOES NOT APPLY TO THE BARLINEK WOOD FLOORS! OUR FLOORBOARDS ARE MADE NOT FROM JUST ONE, BUT THREE LAYERS OF REAL WOOD ARRANGED IN A CROSS STRUCTURE. THE CROSS CONSTRUCTION REDUCES NATURAL TENSION AND COMPRESSION OF WOOD, PROVIDES A BALANCE BETWEEN THE LAYERS OF THE BOARD, AND THUS GUARANTEES THE STABILITY OF THE FLOOR, EVEN UNDER CHANGING WEATHER CONDITIONS OUTSIDE.

PERFECT CONSTRUCTION

THE BARLINEK WOOD FLOORS CONSISTS OF NOT JUST ONE, BUT THREE LAYERS OF REAL WOOD ARRANGED IN A MODERN CROSS CONSTRUCTION. THE BARLINEK WOOD FLOORS LAYERED STRUCTURE ENSURES THE FLOOR'S STABILITY AND ENABLES THE FORCES OF NATURE TO BETAMED AS EFFECTIVELY AS POSSIBLE. IT IS PERFECTLY SUITED FOR UNDERFLOOR HEATING.

Flooring construction 3

The 5Gc Barlock System

Faster and easier installation also in places difficult to access. Simple installation of angularly cut flooring. No additional tools required.*

The Barclick® joint

Fast and easy with the use of an Standard installation kit. High durability of the joint.

Wood protection system Up to 7 layers of UV-cured acrylic lacquer or a sys

Up to 7 layers of UV-cured acrylic lacquer or a system of UV/natural oil.

Surface layer

Selected European wood of the appropriate thickness, protected with a lacquer or oil finish.

Middle layer

Coniferous layer arranged laterally to the surface and a bottom layer.

Saupcsh, construction limits the natural movement of the wood and cracks and squeaking – even in constantly changing weather conditions.

Rottom lave

Coniferous wood arranged laterally to the middle layer reduces the naturalism of two the installation and use of the Barlinek flooring, please refer to the installation manual and your warranty.





OAK ASKANIA OAK PLEASURE






OAK MERSEY OAK BIANCA - 3 STRIP

www.ecofloorcarpet.ae





BANANA SONG OAK CAPPUCCION

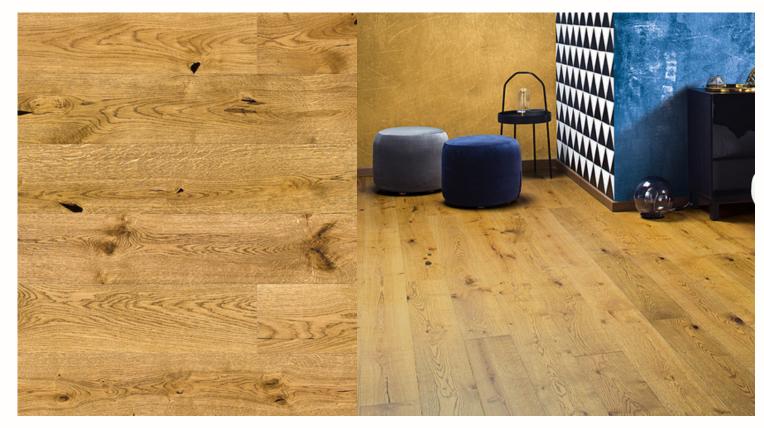



OAK BISCOTTI OAK AZURE WINDOW



OAK GRISSINI



OAK SCONE



OAK NUDE



OAK ALMOND

Benefits of Barlinek floors



100% wood

Flooring is made of 100% real wood of the highest quality. We use 100% of this precious material. The sawdust re- maining after production is used to make wood pellets and fireplace briquette. The bark is used in our gardens.



Stable construction

The thickness of each layer of the Barlinek flooring is not selected by chance. It is the result of

many

years of experience, hundreds of hours of research and tests of the natural wood properties. Our



expert


knowledge has enabled us to develop a floor with an ideal construction to reduce the natural tensions

ot

the material.

Underfloor heating

Not every wood floor is suitable for underfloor heating. Thanks to its layered structure, the Barlinek flooring per- fectly conducts heat and can be successfully applied on both electric and water underfloor heating.

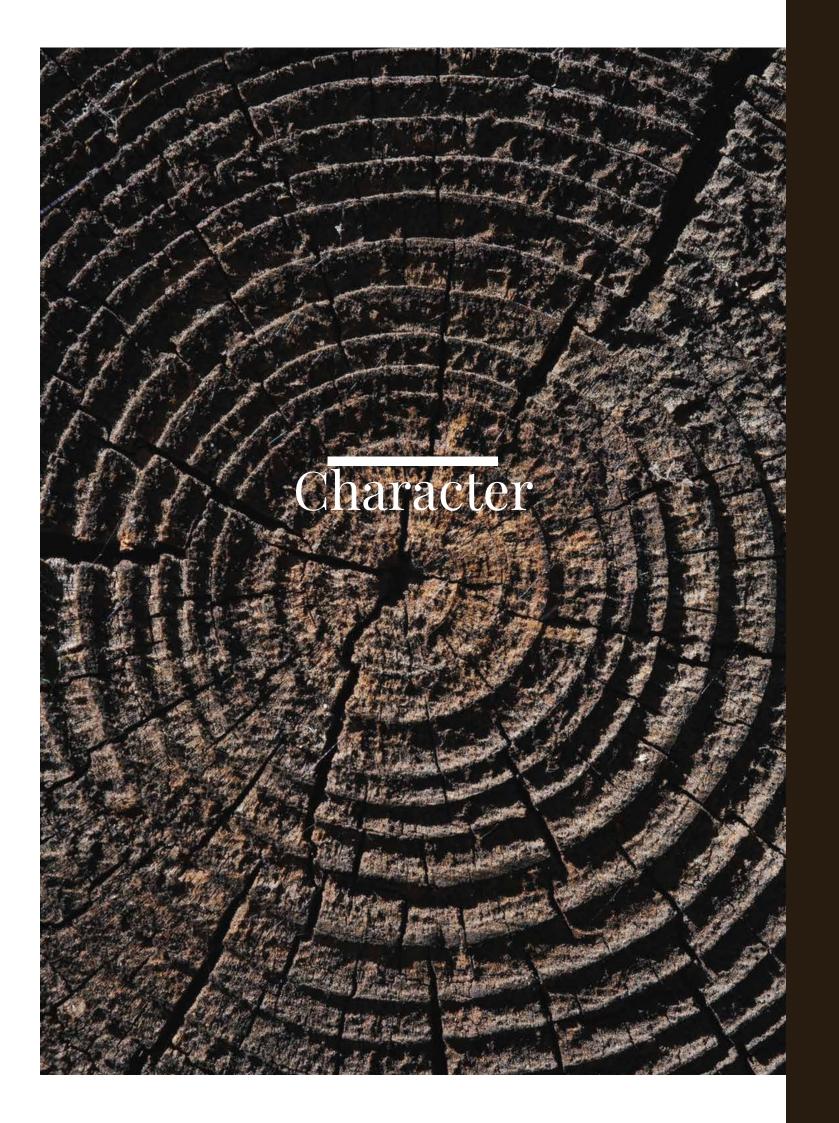

Bring out the depth

Dark floors are a great starting point to creating contrasting arrangements. They compose very well with bright walls and colourful add-ons.





Marsala





Affogato





Oak Caramel





Country White





Oak Mainland

Barlinek floors in harmony with nature

Luxe Blend Collection / Engineered Click Semi Solid Wood Flooring Technical Specifications

STRAIGHT PATTERN PLANK - SINGLE STRIP

Name /	Oak Scone / Oak Mersey / Oak Cappuccino
Total thickness /	14 MM
Width /	
Length /	155 MM
Strip /	2200 MM
Profile /	Single Strip
Construction /	5G Click
Wood Species /	System Three Layer
Surface Finish /	Oak Sawn Cut
Beveling /	
Lengthwise /	4 Side Beveled
TRAIGHT PATTERN PLANK - 3 STRIP	Bar click
Name /	Oak Bianco / Natura
Total thickness /	1.4 MM
Width /	14 MM
Length /	
Strip /	2200 MM
Profile /	<u>3 Strip</u>
Construction /	<u>5G Click</u>
Wood Species /	System Three
Surface Finish /	Layer
Beveling /	Oak
-	Matte Lacquer
Lengthwise /	NO
	Bar click

STRAIGHT PATTERN PLANK - SINGLE STRIP

Name / Oak Plesure / Oak Biscotti / Oak Nude / Oak Grissini ,	Oak Marsala / Oak Askania / Oak Almond / Affogato / Azure Window
Total thickness /	14 MM
Width /	
Length /	2200 MM
Strip /	Single Strip
Profile /	5G Click
Construction /	System Three
Wood Species /	Layer
Surface Finish /	Oak Sawn Cut
Beveling /	Matte Lacquer
Lengthwise /	4 Side Beveled
HEDDINGDONE 2 CTDID	Bar click

HERRINGBONE - 3 STRIP

Name /	Oak Caramel / Oak Mainland / Country white
Total thickness /	14 MM
Width /	
Length /	660 MM
Strip /	Single Strips
Profile /	Crosslock
Construction /	Three Layer
Wood Species /	Oak
Surface Finish /	
Beveling /	Matte Lacquer
Lengthwise /	4 Side Bevelled
5	Bar click

































